

# Performance and Productivity

The hydraulic synchronization system with automatic leveling function prevents uneven lifting or lowering of the load

The integrated emergency lowering device allows the lift to be lowered in the event of a power failure. The lift itself is operated from a safe distance via the control console.

Robust push-buttons ensure smooth operation of the lift.



The control console features an integrated hydraulic unit and thus considerably helps reduce the installation effort. The front access panel can easily be opened for maintenance.



There are no mechanical connections between the platforms, providing for perfect workspace ergonomics and maximum freedom of movement underneath the vehicle

Non-contact inductive proximity switches provide for reliable functioning even in harsh environments. Moreover, there is no mechanical wear.

Model: RLP35  
3500 kg (7716 lbs) capacity

## RLP35 - 3500 kg (7716 lbs) capacity

The low-profile double scissor lift RLP35 is designed especially for the service area. The low closed height means the lift does not need to be installed below ground. Since it is surface mounted, the lift can easily be repositioned or moved in the future.

For decades, Rotary Lift® has been the recognized leader in vehicle service lifts. This legendary reputation has set the standard for quality, durability, reliability and attention to safety throughout the automotive service market.



# RLP35 - 3.5 Ton - Scissor Lift

www.rotarylif.com


## Optional Accessories



4 rubber pads:  
80 mm (3") FJ2427  
40 mm (1-1/2") FJ2428




Long 1000mm (39-3/8")  
drive on ramps for sports  
cars (set of 2) XG140006

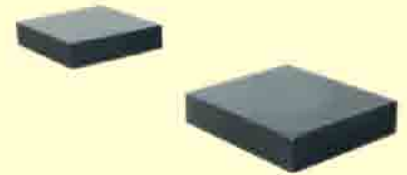

Inground installation kit:  
XG140005

## Specifications

Model:	RLP35
A. Rise	1920 mm (75-1/2")
B. Overall Length (short/long drive on ramps)	2100/3500 mm (82-3/4" / 137-3/4")
C. Width Overall	2050 mm (80-3/4")
D. Closed height	125 mm (5")
E. Platform Length	1500-2000 mm (59" - 78-3/4")
F. Platform Width	625 mm (24-5/8")
Capacity	3500 kg (7716 lbs)
Motor	2HP
Voltage	1PH/50HZ/208-230V 1PH/60HZ/208-230V 3PH/50-60HZ/230-400V
Time of Full Rise	45 seconds
Time to Fully Lower	45 seconds
Weight	950 kg (2094 lbs)

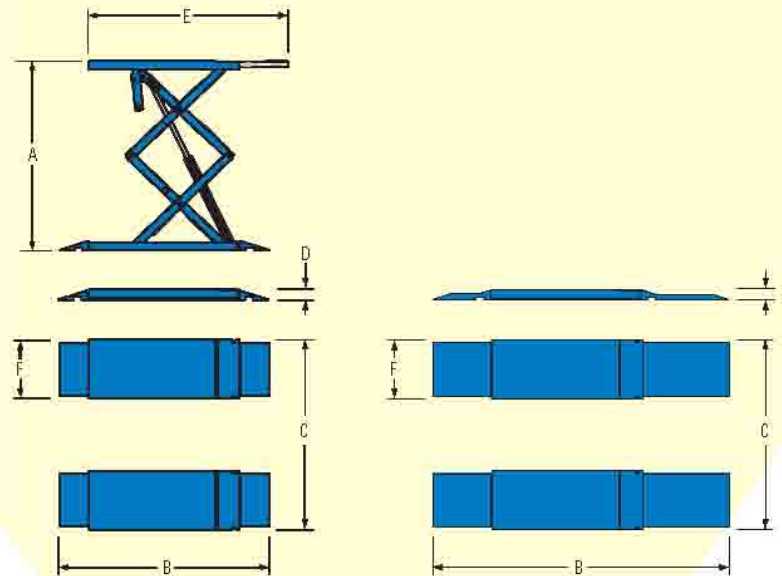

RLP35 with standard  
300 mm (11 3/4") short ramps



RLP35 with optional  
1000 mm (39 3/8") long ramps

### Rotary World HQ

2700 Lanier Drive  
Madison, IN 47250, USA  
www.rotarylif.com

### North America Contact Information

Sales and p 812.273.1622  
Tech Support: f 812.265.9531

### World Wide Contact Information

World HQ/USA: 1.812.273.1622  
Canada: 1.905.812.9920  
European HQ/Germany: +49.771.9233.0  
United Kingdom: +44.178.747.7711

Australasia: +60.3.7860.0285  
Southern Africa: 1.812.273.1622  
Latin America/Caribbean: 1.812.273.1622  
Middle East/Northern Africa: +49.771.9233.0



Lit# RLP35\_2008.05  
©2008 Rotary®, Printed in U.S.A., All Rights Reserved. Unless otherwise indicated, ROTARY, DOVER and all other trademarks are property of Dover Corporation and its affiliates.

**ROTARY LIFT**  
The World's Most Trusted Lift™

